


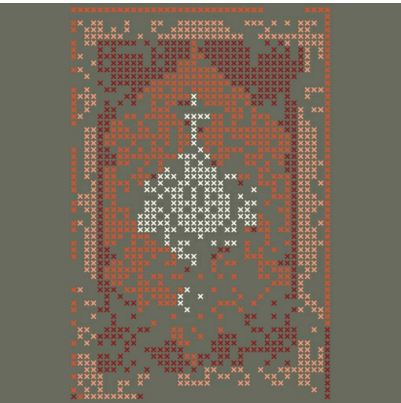

EXPLAIN CROSS STITCH ROZET 1212R1  
| PATTERN 192 X 288 CM | CARPET 400  
CM

PRODUCT SPECIFICATIONS

|                         |              |                                                                                               |
|-------------------------|--------------|-----------------------------------------------------------------------------------------------|
| Surface structure       | DIN ISO 2424 | Frisé                                                                                         |
| Pile material           | DIN ISO 2424 | 100% polyamide 6 Plus                                                                         |
| Primary backing         | DIN ISO 2424 | 75% PES / 25% PA-non woven                                                                    |
| Pattern                 |              | 192 x 288 cm Chromojet printed                                                                |
| (Secondary) backing     | DIN ISO 2424 | Action back                                                                                   |
| Gauge                   |              | 1/10                                                                                          |
| Number of tufts         | ISO 1763     | 217250 p/m²                                                                                   |
| Total weight            | ISO 8543     |  1989 g/m² |
| Total height            | ISO 1765     |  7.5 mm    |
| Pile weight             | DIN ISO 2424 | 1028 g/m²                                                                                     |
| Pile height             | ISO 1766     | 5 mm                                                                                          |
| Pile density            | ISO 8543     | 0.14 g/cm³                                                                                    |
| Manufacturation process | DIN ISO 2424 | Tufted carpet                                                                                 |
| Design                  |              | Geometrisch                                                                                   |

PERFORMANCE SPECIFICATIONS

|                      |                    |                                                                                                                             |
|----------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Comfort level        | EN 1307            |  LC3                                     |
| Usage classification | EN 1307            |  33 - heavy project use                  |
| Castor chair test    | EN 985             |  Suitable for office chairs with castors |
| Slip resistance      | EN 13893 DIN 51130 |  Antislip                                |

|                                |                    |                                                                                                          |                     |
|--------------------------------|--------------------|----------------------------------------------------------------------------------------------------------|---------------------|
| Usage on stairs                |                    |                         | Suitable for stairs |
| Light fastness                 | DIN EN ISO 105 Bo2 |  ≥ 5                    |                     |
| Water fastness                 | DIN EN ISO 105 Eo1 |  ≥ 4                    |                     |
| Resistance to abrasion dry/wet | DIN EN ISO 105 X12 | ≥ 3-4                                                                                                    |                     |
| Antistatic                     | ISO 6356           |  Permanent antistatisch |                     |

## TECHNICAL SPECIFICATIONS

|                              |              |                                                                                                  |  |
|------------------------------|--------------|--------------------------------------------------------------------------------------------------|--|
| Flammability                 | DIN EN 13501 |  Cfl-s1         |  |
| Thermal resistance           | ISO 8302     |  ca 0.15 m² K/W |  |
| Impact sound insulation      | ISO 10140    |  28 dB          |  |
| Static electrical propensity | ISO 6356     |  ≤ 2.0 kV       |  |
| Acoustical absorption        | ISO 11654    |  0.20 αω        |  |

## ENVIRONMENTAL SPECIFICATIONS

|                         |          |                                                                                                                                                           |  |
|-------------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Formaldehyde emissions  | EN 717-1 |  Complies with European E1 standard (European chamber method EN 717-1) |  |
| Green Label Plus        |          |  Yes                                                                   |  |
| GuT                     |          |  GuT-gecertificeerd                                                    |  |
| VOC emissions           |          |  A+ émissions dans l'air intérieur                                     |  |
| CO <sub>2</sub> neutral |          |  Ja                                                                    |  |
| Recyclable              |          |  Ja                                                                    |  |
| CE                      |          |  CE                                                                    |  |

## PRODUCT OPTIONS

|            |                                                                                     |                                                                                                                                                                                                                                                              |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XXtra Care |  | We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor. |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## LAYING DIRECTION

### LEOXX B.V.

Sasdiijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leoxx.com | I www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01

LEOXX reserves the right to make technical adjustments that lead to quality improvement.



[View product](#)