


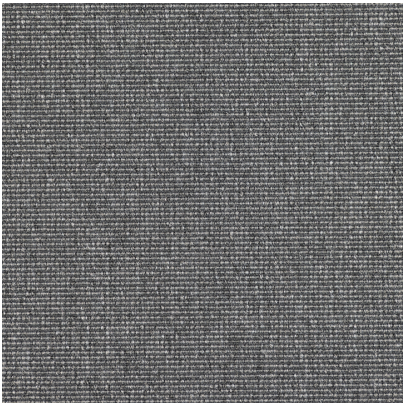

FINE LINES 516 | CARPET 400 CM  
ACOUSTIC

PRODUCT SPECIFICATIONS

|                     |              |                                                                                              |
|---------------------|--------------|----------------------------------------------------------------------------------------------|
| Surface structure   | DIN ISO 2424 |  Vlakweef   |
| Pile material       | DIN ISO 2424 | 100% polyamide 6 Solution Dyed                                                               |
| (Secondary) backing | DIN ISO 2424 | Acoustic felt                                                                                |
| Number of tufts     | ISO 1763     | 164000 p/m²                                                                                  |
| Total weight        | ISO 8543     |  2100 g/m² |
| Total height        | ISO 1765     |  4 mm     |
| Pile weight         | DIN ISO 2424 | 400 g/m²                                                                                     |
| Pile height         | ISO 1766     | 2 mm                                                                                         |
| Design              |              | Lineair                                                                                      |

PERFORMANCE SPECIFICATIONS

|                      |                    |                                                                                                                             |
|----------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Comfort level        | EN 1307            |  LC1                                     |
| Usage classification | EN 1307            |  33 - heavy project use                  |
| Castor chair test    | EN 985             |  Suitable for office chairs with castors |
| Slip resistance      | EN 13893 DIN 51130 |  Antislip                                |
| Usage on stairs      |                    |  Suitable for stairs                     |
| Antistatic           | ISO 6356           |  Permanent antistatisch                  |

TECHNICAL SPECIFICATIONS

|              |              |                                                                                            |
|--------------|--------------|--------------------------------------------------------------------------------------------|
| Flammability | DIN EN 13501 |  Cfl-s1 |
|--------------|--------------|--------------------------------------------------------------------------------------------|

|                              |           |                                                                                   |                |
|------------------------------|-----------|-----------------------------------------------------------------------------------|----------------|
| Thermal resistance           | ISO 8302  |  | ca 0.09 m² K/W |
| Impact sound insulation      | ISO 10140 |  | 18 dB          |
| Static electrical propensity | ISO 6356  |  | ≤ 2.0 kV       |
| Acoustical absorption        | ISO 11654 |  | 0.15 αω        |

## ENVIRONMENTAL SPECIFICATIONS

|                         |          |                                                                                                                                                                        |                                                                       |
|-------------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Formaldehyde emissions  | EN 717-1 |                                                                                       | Complies with European E1 standard (European chamber method EN 717-1) |
| GuT                     |          |                                                                                       | GuT-gecertificeerd                                                    |
| VOC emissions           |          | <br> | Indoor Air Comfort Gold<br>M1                                         |
| CO <sub>2</sub> neutral |          |                                                                                       | Ja                                                                    |
| Recyclable              |          |                                                                                       | Ja                                                                    |
| CE                      |          |                                                                                     | CE                                                                    |

## PRODUCT OPTIONS

|            |                                                                                     |                                                                                                                                                                                                                                                              |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XXtra Care |  | We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor. |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

### LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E [info@leoxx.com](mailto:info@leoxx.com) | I [www.leoxx.com](http://www.leoxx.com)

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)