


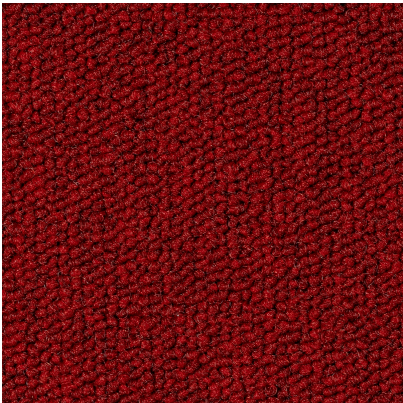

PLANA 122 | PLANK 24 X 96 CM

PRODUCT SPECIFICATIONS

|                         |              |                                                                                                                          |
|-------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------|
| Surface structure       | DIN ISO 2424 | Bouclé                                                                                                                   |
| Pile material           | DIN ISO 2424 |  100% Econyl (gerecyclede polyamide) PD |
| (Secondary) backing     | DIN ISO 2424 | 100% recycled compact felt 350 g/m²                                                                                      |
| Gauge                   |              | 1/10                                                                                                                     |
| Number of tufts         | ISO 1763     | 160000 p/m²                                                                                                              |
| Total weight            | ISO 8543     |  2600 g/m²                            |
| Total height            | ISO 1765     |  7 mm                                 |
| Pile weight             | DIN ISO 2424 | 675 g/m²                                                                                                                 |
| Pile height             | ISO 1766     | 2.5 mm                                                                                                                   |
| Manufacturation process | DIN ISO 2424 | Tufted carpet                                                                                                            |
| Design                  |              | Gemêleerd                                                                                                                |

PERFORMANCE SPECIFICATIONS

|                                   |                    |                                                                                                                             |
|-----------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Usage classification              | EN 1307            |  33 - heavy project use                  |
| Castor chair test                 | EN 985             |  Suitable for office chairs with castors |
| Slip resistance                   | EN 13893 DIN 51130 |  Antislip                                |
| Antistatic                        | ISO 6356           |  Permanent antistatisch                  |
| Dimensional stability             | EN 986             |  Falls within norms                      |
| Light Reflectance Value (LRV - Y) |                    |  4.74                                    |

## TECHNICAL SPECIFICATIONS

|                         |              |                                                                                   |                     |
|-------------------------|--------------|-----------------------------------------------------------------------------------|---------------------|
| Flammability            | DIN EN 13501 |  | Cfl-s1              |
| Thermal resistance      | ISO 8302     |  | ca 0.12 m² K/W      |
| Impact sound insulation | ISO 10140    |  | 25 dB               |
| Acoustical absorption   | ISO 11654    |  | 0.25 α <sub>w</sub> |

## ENVIRONMENTAL SPECIFICATIONS

|                         |          |                                                                                     |                                                                       |
|-------------------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Formaldehyde emissions  | EN 717-1 |    | Complies with European E1 standard (European chamber method EN 717-1) |
| GuT                     |          |    | Geproduceerd conform GUT normeringen                                  |
| VOC emissions           |          |    | Indoor Air Comfort Gold                                               |
| CO <sub>2</sub> neutral |          |    | Ja                                                                    |
| Recyclable              |          |   | Ja                                                                    |
| CE                      |          |  | CE                                                                    |

## PRODUCT OPTIONS

|            |                                                                                     |                                                                                                                                                                                                                                                              |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XXtra Care |  | We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor. |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

## LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E [info@leoxx.com](mailto:info@leoxx.com) | I [www.leoxx.com](http://www.leoxx.com)

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)