


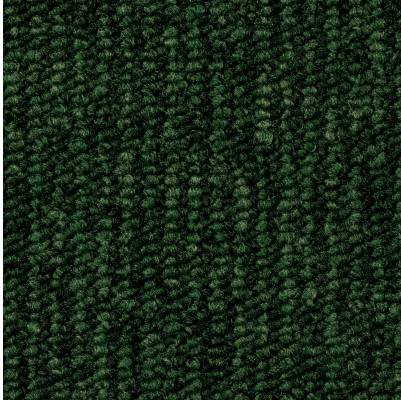

PLANA LIVORE 435 | TILE 48 X 48 CM

PRODUCT SPECIFICATIONS

Surface structure	DIN ISO 2424	Bouclé
Pile material	DIN ISO 2424	50% Econyl + 50% polyamide PD
(Secondary) backing	DIN ISO 2424	100% recycled compact felt 350 g/m ²
Gauge		1/10
Number of tufts	ISO 1763	152000 p/m ²
Total weight	ISO 8543	 2600 g/m ²
Total height	ISO 1765	 7 mm
Pile weight	DIN ISO 2424	700 g/m ²
Pile height	ISO 1766	2.5 mm
Manufacturation process	DIN ISO 2424	Tufted carpet
Design		Gemêleerd
		Lineair

PERFORMANCE SPECIFICATIONS

Usage classification	EN 1307	 33 - heavy project use
Castor chair test	EN 985	 Suitable for office chairs with castors
Slip resistance	EN 13893 DIN 51130	 Antislip
Antistatic	ISO 6356	 Permanent antistatisch
Dimensional stability	EN 986	 Falls within norms
Light Reflectance Value (LRV - Y)		 4.24

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leox.com | I www.leox.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01

TECHNICAL SPECIFICATIONS

Flammability	DIN EN 13501	 Cfl-s1
Thermal resistance	ISO 8302	 ca 0.12 m² K/W
Impact sound insulation	ISO 10140	 25 dB
Acoustical absorption	ISO 11654	 0.25 αω

ENVIRONMENTAL SPECIFICATIONS

Formaldehyde emissions	EN 717-1	 Complies with European E1 standard (European chamber method EN 717-1)
GuT		 Geproduceerd conform GUT normeringen
VOC emissions		 Indoor Air Comfort Gold
CO ₂ neutral		 Ja
Recyclable		 Ja
CE		 CE

PRODUCT OPTIONS

XXtra Care		We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor.
------------	---	--

LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leoxx.com | I www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)