


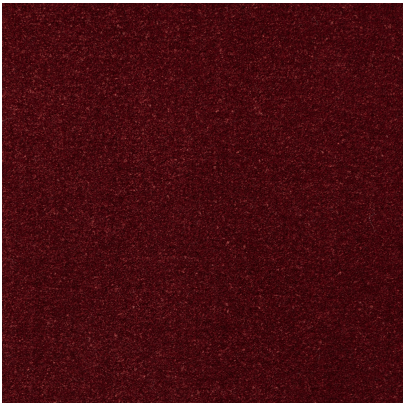

SATIN SENSE 185 | CUSTOM RUG

PRODUCT SPECIFICATIONS

|                     |              |                                                                                               |
|---------------------|--------------|-----------------------------------------------------------------------------------------------|
| Surface structure   | DIN ISO 2424 | Saxony                                                                                        |
| Pile material       | DIN ISO 2424 | 100% polyamide PA 6.6 Piece Dyed                                                              |
| Finishing           |              | Maatwerk                                                                                      |
| (Secondary) backing | DIN ISO 2424 | AB felt                                                                                       |
| Gauge               |              | 5/64                                                                                          |
| Number of tufts     | ISO 1763     | 275000 p/m²                                                                                   |
| Total weight        | ISO 8543     |  2900 g/m² |
| Total height        | ISO 1765     |  11.2 mm   |
| Pile weight         | DIN ISO 2424 | 2075 g/m²                                                                                     |
| Pile height         | ISO 1766     | 10 mm                                                                                         |
| Design              |              | Uni                                                                                           |

PERFORMANCE SPECIFICATIONS

|                      |                    |                                                                                                                             |
|----------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Comfort level        | EN 1307            |  LC5                                     |
| Usage classification | EN 1307            |  33 - heavy project use                  |
| Castor chair test    | EN 985             |  Suitable for office chairs with castors |
| Slip resistance      | EN 13893 DIN 51130 |  Antislip                                |
| Antistatic           | ISO 6356           |  Permanent antistatisch                  |

TECHNICAL SPECIFICATIONS

|                          |              |                                                                                   |                     |
|--------------------------|--------------|-----------------------------------------------------------------------------------|---------------------|
| Flammability             | DIN EN 13501 |  | Cfl-s1              |
| Thermal resistance       | ISO 8302     |  | 0.17 m² K/W         |
| Impact sound insulation  | ISO 10140    |  | 33 dB               |
| Acoustical absorption    | ISO 11654    |  | 0.25 α <sub>ω</sub> |
| Sound absorption 125 Hz  | ISO 354      |                                                                                   | 0.01 α <sub>s</sub> |
| Sound absorption 250 Hz  | ISO 354      |                                                                                   | 0.03 α <sub>s</sub> |
| Sound absorption 500 Hz  | ISO 354      |                                                                                   | 0.15 α <sub>s</sub> |
| Sound absorption 1000 Hz | ISO 354      |                                                                                   | 0.49 α <sub>s</sub> |
| Sound absorption 2000 Hz | ISO 354      |                                                                                   | 0.6 α <sub>s</sub>  |
| Sound absorption 4000 Hz | ISO 354      |                                                                                   | 0.83 α <sub>s</sub> |

## ENVIRONMENTAL SPECIFICATIONS

|                         |          |                                                                                     |                                                                       |
|-------------------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Formaldehyde emissions  | EN 717-1 |    | Complies with European E1 standard (European chamber method EN 717-1) |
| GuT                     |          |  | GuT-gecertificeerd                                                    |
| VOC emissions           |          |  | Indoor Air Comfort Gold                                               |
| CO <sub>2</sub> neutral |          |  | Ja                                                                    |
| Recyclable              |          |  | Ja                                                                    |
| CE                      |          |  | CE                                                                    |

## PRODUCT OPTIONS

|            |                                                                                     |                                                                                                                                                                                                                                                              |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XXtra Care |  | We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor. |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

### LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E [info@leoxx.com](mailto:info@leoxx.com) | I [www.leoxx.com](http://www.leoxx.com)

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)