


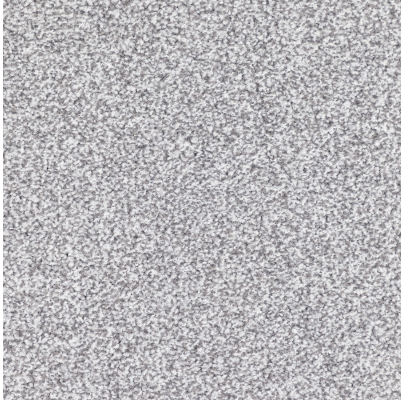

SOLID MIX 592 | CARPET 400 CM

PRODUCT SPECIFICATIONS

Surface structure	DIN ISO 2424	Velours
Pile material	DIN ISO 2424	100% polyamide PA 6.6 Piece Dyed
(Secondary) backing	DIN ISO 2424	Action back
Gauge		5/64
Number of tufts	ISO 1763	255000 p/m²
Total weight	ISO 8543	 1800 g/m²
Total height	ISO 1765	 6.9 mm
Pile weight	DIN ISO 2424	1050 g/m²
Pile height	ISO 1766	4.8 mm
Design		Gemêleerd

PERFORMANCE SPECIFICATIONS

Comfort level	EN 1307	 LC3
Usage classification	EN 1307	 33 - heavy project use
Castor chair test	EN 985	 Suitable for office chairs with castors
Slip resistance	EN 13893 DIN 51130	 Antislip
Usage on stairs		 Stair suitable living
Light fastness	DIN EN ISO 105 B02	 ≥ 5
Water fastness	DIN EN ISO 105 E01	 ≥ 4

LEOXX B.V.

Sasdiijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leoxx.com | I www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01

Resistance to abrasion dry/wet	DIN EN ISO 105 X12	≥ 4
Antistatic	ISO 6356	 Permanent antistatisch

TECHNICAL SPECIFICATIONS

Horizontal resistance	ISO 10965	≤ 10 ¹⁰ Ω
Static electrical propensity	EN 1815	 ≤ 2.0 kV
Vertical resistance	ISO 10965	≤ 10 ¹⁰ Ω
Flammability	DIN EN 13501	 Bfl-s1
Thermal resistance	ISO 8302	 ≤ 0.15 m² K/W
Impact sound insulation	ISO 10140	 27 dB
Acoustical absorption	ISO 11654	 0.20 α _w
Sound absorption 125 Hz	ISO 354	-0.05 α _s
Sound absorption 250 Hz	ISO 354	-0.01 α _s
Sound absorption 500 Hz	ISO 354	0.07 α _s
Sound absorption 1000 Hz	ISO 354	0.18 α _s
Sound absorption 2000 Hz	ISO 354	0.37 α _s
Sound absorption 4000 Hz	ISO 354	0.55 α _s

ENVIRONMENTAL SPECIFICATIONS

Formaldehyde emissions	EN 717-1	 Complies with European E1 standard (European chamber method EN 717-1)
GuT		 GuT-gecertificeerd
VOC emissions		 A+ émissions dans l'air intérieur
CO ₂ neutral		 Ja
Recyclable		 Ja
CE		 CE

PRODUCT OPTIONS

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leoxx.com | I www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01

XXtra Care



We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor.

LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.



[View product](#)

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | **E** info@leoxx.com | **I** www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01