


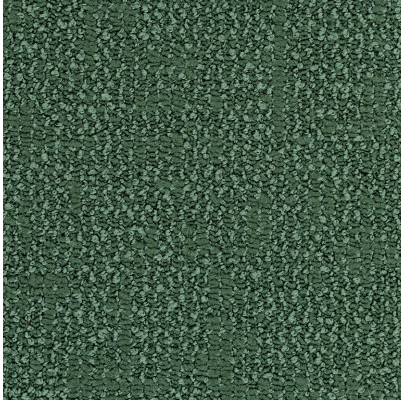

TEXTURE LOOP 415 | CARPET 400 CM

PRODUCT SPECIFICATIONS

Surface structure	DIN ISO 2424		Gestructureerde bouclé
Pile material	DIN ISO 2424		100% Econyl (gerecyclede polyamide) PD
(Secondary) backing	DIN ISO 2424		Action back
Gauge			1/12
Number of tufts	ISO 1763		198000 p/m ²
Total weight	ISO 8543		2700 g/m ²
Total height	ISO 1765		8 mm
Pile weight	DIN ISO 2424		950 g/m ²
Pile height	ISO 1766		4 mm
Pile density	ISO 8543		0.15 g/cm ³
Design			Uni
			Abstract

PERFORMANCE SPECIFICATIONS

Comfort level	EN 1307		LC2
Usage classification	EN 1307		33 - heavy project use
Castor chair test	EN 985		Suitable for office chairs with castors
Slip resistance	EN 13893 DIN 51130		Antislip
Usage on stairs			Suitable for stairs
Antistatic	ISO 6356		Permanent antistatisch

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leox.com | I www.leox.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01

TECHNICAL SPECIFICATIONS

Flammability	DIN EN 13501	 Cfl-s1
Thermal resistance	ISO 8302	 0.14 m² K/W
Impact sound insulation	ISO 10140	 ≥8 dB
Acoustical absorption	ISO 11654	 0.20 α _w

ENVIRONMENTAL SPECIFICATIONS

Formaldehyde emissions	EN 717-1	 Complies with European E1 standard (European chamber method EN 717-1)
GuT		 Geproduceerd conform GUT normeringen
VOC emissions		 Indoor Air Comfort Gold
CO ₂ neutral		 Ja
Recyclable		 Ja
CE		 CE

PRODUCT OPTIONS

XXtra Care		We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor.
------------	---	--

LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leoxx.com | I www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)