


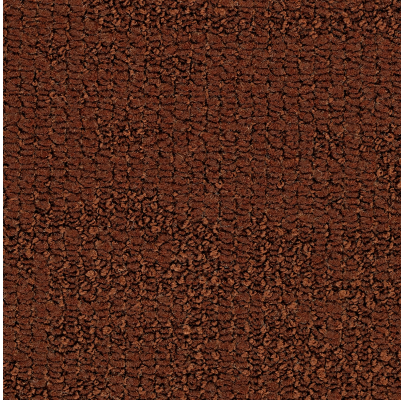

## TEXTURE LOOP 711 | TILE 48 X 48 CM

## PRODUCT SPECIFICATIONS

|                     |              |                                                                                     |                                        |
|---------------------|--------------|-------------------------------------------------------------------------------------|----------------------------------------|
| Surface structure   | DIN ISO 2424 |                                                                                     | Gestructureerde bouclé                 |
| Pile material       | DIN ISO 2424 |    | 100% Econyl (gerecyclede polyamide) PD |
| (Secondary) backing | DIN ISO 2424 |                                                                                     | 100% recycled compact felt 350 g/m²    |
| Gauge               |              |                                                                                     | 1/12                                   |
| Number of tufts     | ISO 1763     |                                                                                     | 198000 p/m²                            |
| Total weight        | ISO 8543     |  | 3050 g/m²                              |
| Total height        | ISO 1765     |  | 8.5 mm                                 |
| Pile weight         | DIN ISO 2424 |                                                                                     | 950 g/m²                               |
| Pile height         | ISO 1766     |                                                                                     | 4 mm                                   |
| Pile density        | ISO 8543     |                                                                                     | 0.15 g/cm³                             |
| Design              |              |                                                                                     | Uni                                    |
|                     |              |                                                                                     | Abstract                               |

## PERFORMANCE SPECIFICATIONS

|                      |                    |                                                                                     |                                         |
|----------------------|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------|
| Comfort level        | EN 1307            |  | LC2                                     |
| Usage classification | EN 1307            |  | 33 - heavy project use                  |
| Castor chair test    | EN 985             |  | Suitable for office chairs with castors |
| Fray resistant       |                    |  | Rafelt niet bij het versnijden          |
| Slip resistance      | EN 13893 DIN 51130 |  | Antislip                                |
| Antistatic           | ISO 6356           |  | Permanent antistatisch                  |

## LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leox.com | I www.leox.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01

|                       |        |                                                                                   |                    |
|-----------------------|--------|-----------------------------------------------------------------------------------|--------------------|
| Dimensional stability | EN 986 |  | Falls within norms |
|-----------------------|--------|-----------------------------------------------------------------------------------|--------------------|

## TECHNICAL SPECIFICATIONS

|                         |              |                                                                                   |                     |
|-------------------------|--------------|-----------------------------------------------------------------------------------|---------------------|
| Flammability            | DIN EN 13501 |  | Bfl-s1              |
| Thermal resistance      | ISO 8302     |  | 0.15 m² K/W         |
| Impact sound insulation | ISO 10140    |  | 30 dB               |
| Acoustical absorption   | ISO 11654    |  | 0.30 α <sub>w</sub> |

## ENVIRONMENTAL SPECIFICATIONS

|                         |          |                                                                                     |                                                                       |
|-------------------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Formaldehyde emissions  | EN 717-1 |    | Complies with European E1 standard (European chamber method EN 717-1) |
| GuT                     |          |    | Geproduceerd conform GUT normeringen                                  |
| VOC emissions           |          |    | Indoor Air Comfort Gold                                               |
| CO <sub>2</sub> neutral |          |  | Ja                                                                    |
| Recyclable              |          |  | Ja                                                                    |
| CE                      |          |  | CE                                                                    |

## PRODUCT OPTIONS

XXtra Care



We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor.

## LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

### LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E [info@leoxx.com](mailto:info@leoxx.com) | I [www.leoxx.com](http://www.leoxx.com)

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)