


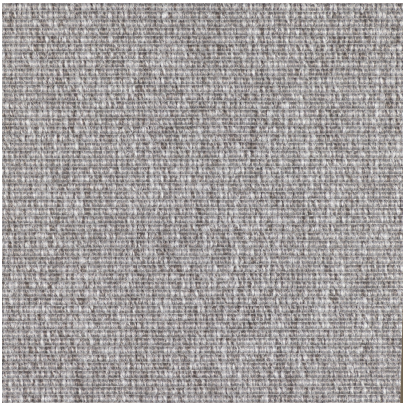

# WOVEN LINES 542 | CARPET 400 CM ACOUSTIC

## PRODUCT SPECIFICATIONS

|                     |              |                                                                                     |                                        |
|---------------------|--------------|-------------------------------------------------------------------------------------|----------------------------------------|
| Surface structure   | DIN ISO 2424 |                                                                                     | Vlak geweven luspool                   |
| Pile material       | DIN ISO 2424 |    | 100% Econyl (gerecyclede polyamide) PD |
| (Secondary) backing | DIN ISO 2424 |                                                                                     | Pre-coat + 600 g compact felt backing  |
| Number of tufts     | ISO 1763     |                                                                                     | 0 p/m²                                 |
| Total weight        | ISO 8543     |   | 3000 g/m²                              |
| Total height        | ISO 1765     |  | 7.5 mm                                 |
| Pile weight         | DIN ISO 2424 |                                                                                     | 785 g/m²                               |
| Pile height         | ISO 1766     |                                                                                     | 2 mm                                   |
| Design              |              |                                                                                     | Lineair                                |

## PERFORMANCE SPECIFICATIONS

|                      |                    |                                                                                     |                                         |
|----------------------|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------|
| Comfort level        | EN 1307            |  | LC1                                     |
| Usage classification | EN 1307            |  | 33 - heavy project use                  |
| Castor chair test    | EN 985             |  | Suitable for office chairs with castors |
| Slip resistance      | EN 13893 DIN 51130 |  | Antislip                                |
| Usage on stairs      |                    |  | Suitable for stairs                     |
| Antistatic           | ISO 6356           |  | Permanent antistatisch                  |

## TECHNICAL SPECIFICATIONS

|                       |           |                           |
|-----------------------|-----------|---------------------------|
| Horizontal resistance | ISO 10965 | 3.4 x 10 <sup>-12</sup> Ω |
|-----------------------|-----------|---------------------------|

|                              |              |                                                                                   |                              |
|------------------------------|--------------|-----------------------------------------------------------------------------------|------------------------------|
| Vertical resistance          | ISO 10965    |                                                                                   | $1.4 \times 10^{-12} \Omega$ |
| Flammability                 | DIN EN 13501 |  | Cfl-s1                       |
| Impact sound insulation      | ISO 10140    |  | 26 dB                        |
| Static electrical propensity | ISO 6356     |  | < 1.5 kV                     |
| Acoustical absorption        | ISO 11654    |  | 0.10 $\alpha_w$              |

## ENVIRONMENTAL SPECIFICATIONS

|                         |          |                                                                                     |                                                                       |
|-------------------------|----------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Formaldehyde emissions  | EN 717-1 |    | Complies with European E1 standard (European chamber method EN 717-1) |
| GuT                     |          |    | Geproduceerd conform GUT normeringen                                  |
| VOC emissions           |          |    | Indoor Air Comfort Gold                                               |
| CO <sub>2</sub> neutral |          |    | Ja                                                                    |
| Recyclable              |          |   | Ja                                                                    |
| CE                      |          |  | CE                                                                    |

## PRODUCT OPTIONS

|            |                                                                                     |                                                                                                                                                                                                                                                              |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| XXtra Care |  | We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor. |
|------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

### LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E [info@leoxx.com](mailto:info@leoxx.com) | I [www.leoxx.com](http://www.leoxx.com)

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)