


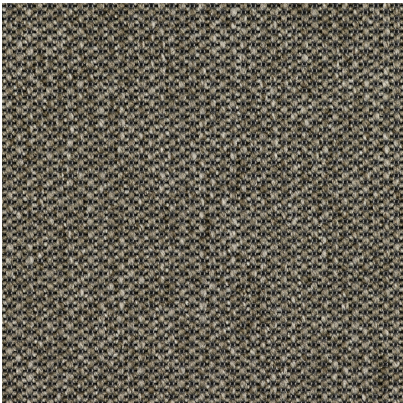

WOVEN MESH 456 | CARPET 400 CM
ACOUSTIC

PRODUCT SPECIFICATIONS

Surface structure	DIN ISO 2424		Vlak geweven luspool
Pile material	DIN ISO 2424		100% Econyl (gerecyclede polyamide) PD
(Secondary) backing	DIN ISO 2424		Pre-coat + 600 g compact felt backing
Number of tufts	ISO 1763		0 p/m²
Total weight	ISO 8543		3000 g/m²
Total height	ISO 1765		7.5 mm
Pile weight	DIN ISO 2424		850 g/m²
Pile height	ISO 1766		2.5 mm
Design			Geometrisch

PERFORMANCE SPECIFICATIONS

Comfort level	EN 1307		LC1
Usage classification	EN 1307		33 - heavy project use
Castor chair test	EN 985		Suitable for office chairs with castors
Slip resistance	EN 13893 DIN 51130		Antislip
Usage on stairs			Suitable for stairs
Antistatic	ISO 6356		Permanent antistatisch

TECHNICAL SPECIFICATIONS

Horizontal resistance	ISO 10965	3.4 x 10 ⁻¹² Ω
-----------------------	-----------	---------------------------

Vertical resistance	ISO 10965		$1.4 \times 10^{-12} \Omega$
Flammability	DIN EN 13501		Cfl-s1
Impact sound insulation	ISO 10140		26 dB
Static electrical propensity	ISO 6356		< 1.5 kV
Acoustical absorption	ISO 11654		0.10 $\alpha\omega$

ENVIRONMENTAL SPECIFICATIONS

Formaldehyde emissions	EN 717-1		Complies with European E1 standard (European chamber method EN 717-1)
GuT			Geproduceerd conform GUT normeringen
VOC emissions			Indoor Air Comfort Gold
CO ₂ neutral			Ja
Recyclable			Ja
CE			CE

PRODUCT OPTIONS

XXtra Care		We like to keep our floors beautiful for as long as possible. With XXtra Care we offer everyone with a LEOXX floor a periodical maintenance concept, matching the floor and its function. Ask about the possibilities and extend the lifespan of your floor.
------------	---	--

LAYING DIRECTION

LEOXX reserves the right to make technical adjustments that lead to quality improvement.

LEOXX B.V.

Sasdijk 14, 8281 BM Genemuiden (NL)

T +31 30 635 10 00 | E info@leoxx.com | I www.leoxx.com

IBAN NL87 RABO 0305 9745 13 | KvK 30151348 | BTW NL807305157B01



[View product](#)